


8 7 6 5 4 3 2 1

REV	DESCRIPTION:	BY	DATE
-	TENTATIVE	TYH	JUL/28/03

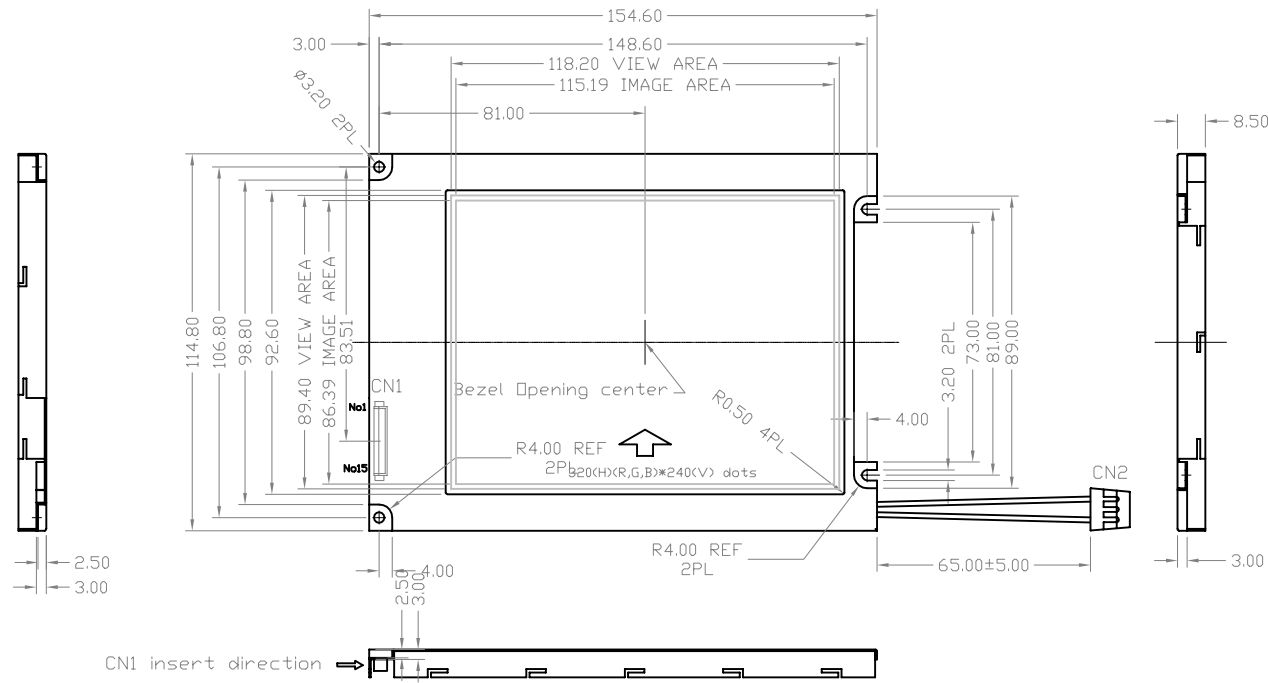

NOTES: UNLESS OTHERWISE SPECIFIED

1. DIMENSIONS ARE MILLIMETERS.
2. TOLERANCES ARE ±0.20.
3. LCD TYPE: 4096 COLOR STN
4. LCD MODE: NEGATIVE
5. POLARIZER: TRANSMISSIVE
6. VIEWING ANGLE: 6:00
7. OPERATING TEMPERATURE: 0°C TO 50°C.
8. STORAGE TEMPERATURE: -10°C TO 60°C
9. DRIVE METHOD: 1/240 DUTY, 1/16 BIAS
10. SUPPLY VOLTAGE<LOGIC>: 5.0 V
11. SUPPLY VOLTAGE<LCD>: 25.8 V
12. BACKGROUND COLOR: BLACK
13. DRIVING IC PACKAGE: TAB
14. BACKLIGHT TYPE: CCFL
15. BACKLIGHT COLOR: WHITE
16. CONNECTORS CN1: 3802-15(E&T)
17. CONNECTORS CN2: BHR-03VS-1(JST)

<p>THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.</p> <p>THIRD ANGLE PROJECTION</p>	ENGR MANAGER:	DATE:
	DWN BY: TYH	DATE: JUL/28/03
	DRAWING TITLE: 0G32245 MOD	
	DRAWING No.: 32245MOD	REV: -
SCALE :	SHEET: 2 OF 1	

8 7 6 5 4 3 2 1