

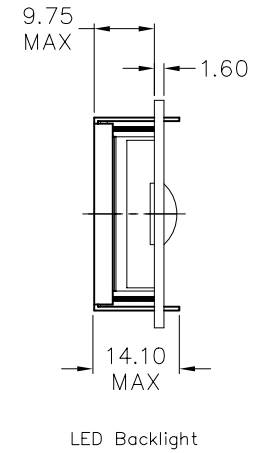


REV	DESCRIPTION:	BY	DATE
-	RELEASED	HXH	04/12/02
A	OECR#1644	HXH	09/27/02

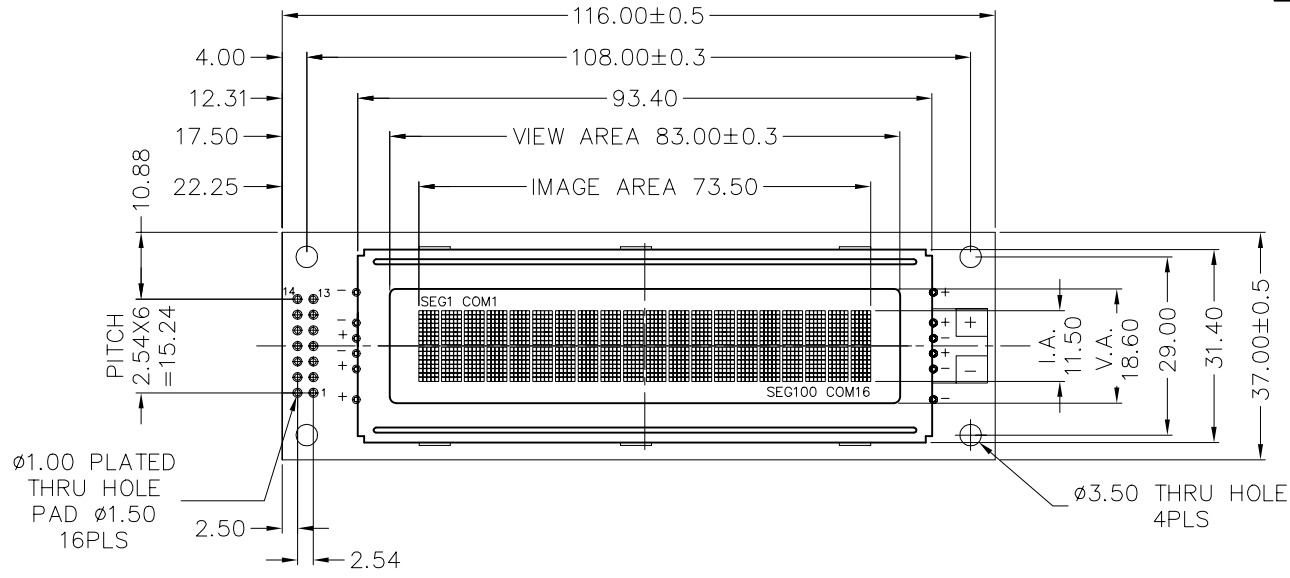

CONNECTOR PINOUT		
PIN#	SYMBOL	FUNCTIONS
1	V _{SS}	GND
2	V _{DD}	Power supply value +5V
3	V ₀	LIQUID CRYSTAL DRIVING VOLTAGE
4	RS	L:Instruction code Input H:date input
5	R/W	L:Date write from MPU to LCM. H:Date read from LCM to MPU.
6	E	ENABLE SIGNAL
7	DB0	DATA BUS LINES
8	DB1	
9	DB2	
10	DB3	
11	DB4	
12	DB5	
13	DB6	
14	DB7	

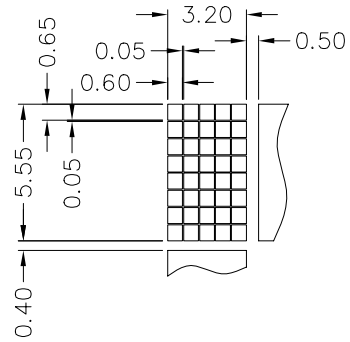

NOTE:
 1. ALL DIMENSIONS IN MM
 2. REFER TO MODULE PRODUCT SPECIFICATION FOR SPECIFIC CONFIGURATIONS AND BILL OF MATERIALS.

<p>THIS DOCUMENT IS CONFIDENTIAL PROPRIETARY INFORMATION OF OCULAR CORPORATION AND SHALL NOT BE DISCLOSED OR COPIED OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT IS SPECIFICALLY FURNISHED WITHOUT THE PRIOR WRITTEN CONSENT OF OCULAR CORPORATION.</p>	UNLESS OTHERWISE NOTED:		ENGR MANAGER:	DATE:
	UNITS	DECIMAL	DWN BY:	HXH DATE: 04/12/02
	mm	X. [X.X] ±0.5 [0.02]	DRAWING TITLE: OM2012 MODULE	
	[INCH]	X.X [X.XX] ±0.20 [0.008]	DRAWING No.: 20212MOD	
		X.XX [X.XXX] ±0.13 [0.005]	REV: A	
ANGLES	PLATED THRU HOLES +0.08 [0.003] -0.03 [0.001]	SCALE :	SHEET: 1 OF 1	
THIRD ANGLE PROJECTION	±0.5°	NON-PLATED THRU HOLES +0.08 [0.003] -0.03 [0.001]		